



LIFTING HOOKS

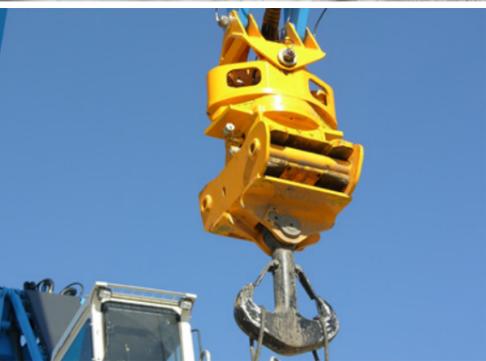


MANTSINEN Lifting Hooks TECHNICAL SPECIFICATIONS


STICK ATTACHED HOOK

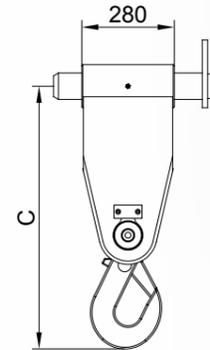


ANCHOR HOOK MC620





SINGLE HOOK MC620




DOUBLE HOOK MC620



ANCHOR HOOK WITH QUICK COUPLER MC620

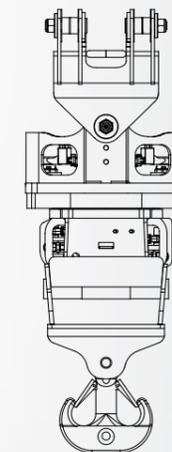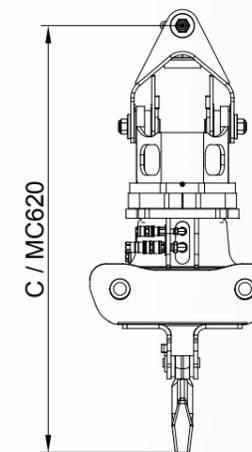

STICK ATTACHED ANCHOR HOOK



Model	C [mm]	C / MC620 [mm]	Weight* [kg]	SWL [kg]
Stick attached hook **	795	-	110	15 000
Anchor hook MC620	1 060	2 360	490	25 000
Anchor hook MC720	1 080	2 380	520	50 000
Single hook MC620	695	1 995	220	15 000
Double hook MC620	970	2 270	360	2 x 12 500
Stick attached anchor hook ***	1 140	-	150	25 000

From SWL 15 t single hook to SWL 50 t anchor hook.

LIFTING HOOKS

Lifting hook is an essential tool in many port operations. Several sizes are available for different purposes. Anchor hooks will be delivered with a parking cradle.

When equipped with an adapter for Mantsinen quick coupling system, the attachment can be changed in a few minutes.

* The weight with adapter, but excluding quick coupler and link

** Hook attached directly to the end of stick

*** Hook attached directly to the end of stick, manually rotated

• Also available with R4 fixed rotator and MC720 quick coupler

Specifications subject to change without prior notice.
The photographs and drawings in this brochure are for illustrative purposes only.
Refer to the Operator's Manual for instructions on the proper use of this equipment.

