




Tire Size: **12.00-24**
 Pattern: **Continental ContainerMaster**
 Ply rate: **20PR**
 Load Index / Speed: **178 / A5**
 Tread: **E4**
 Article No / EAN No: **1215135 / 4019238586695**
 Application: **Industrial**



Tube Type: **TT**
 Rim: **24x8.50V**
 Tube: **12.00-24TB**
 Flap: **11.00/12.00R25**
 Valve: **TR78A**

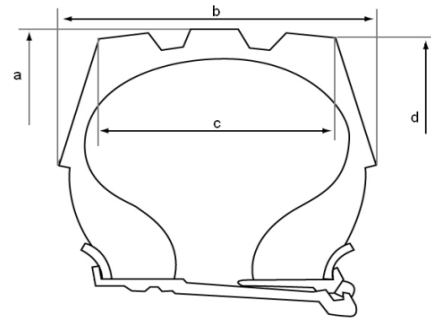

Technical Tire Data:

Outside diameter	(a)	[mm]	1285	+/-1%
Width	(b)	[mm]	335	+/-1%
Tread width	(c)	[mm]	-	+/-1%
Tread edge diameter	(d)	[mm]	-	+/-1%
Loaded static radius*		[mm]	-	+/-1%
Rolling circumference*		[mm]	-	+/-1%
Static loaded width*		[mm]	-	+/-1%
Tread Depth		[mm]	35,5	+/-1%
Minimum dual spacing		[mm]	-	+/-1%

*Reference load [kg] **7.500**
 *Rated pressure [bar] **10**

Tire Load Capacity [kg] according to ETRTO**

Counterbalanced forklifts and similar vehicles (Reachstacker, ECH etc.)

Speed	0 km/h	1 km/h	5 km/h	10 km/h	20 km/h	25 km/h	30 km/h
Load wheel***	13.500	12.000	10.900	10.100	9.500	9.400	9.200
Steering wheel	10.800	9.600	8.700	8.100	7.700	7.500	7.300

Other vehicles

Speed	0 km/h	1 km/h	5 km/h	10 km/h	20 km/h	25 km/h	30 km/h
All wheels	10.800	9.600	8.700	8.100	7.700	7.500	7.300

** All loads valid for 10bar inflation pressure.
 *** applicable for cyclize service only

Date printed	14.06.2013	Date created	13.05.2013	Owner	MP
--------------	------------	--------------	------------	-------	----


Continental Reifen Deutschland GmbH
 P.O. Box 169
 D-30001 Hannover
 Germany

Business Unit Industrial Tires
 Phone +49 (0) 511-976 - 40760
 Fax +49 (0) 511-976 - 4022




Tire Size: **12.00-24**
 Pattern: **Continental**
 Ply rate: **20PR**
 Load Index / Speed: **178 / A5**
 Tread: **E4**
 Article No / EAN No: **1215135 / 4019238586695**
 Application: **Industrial**

Radial Deflection [mm]

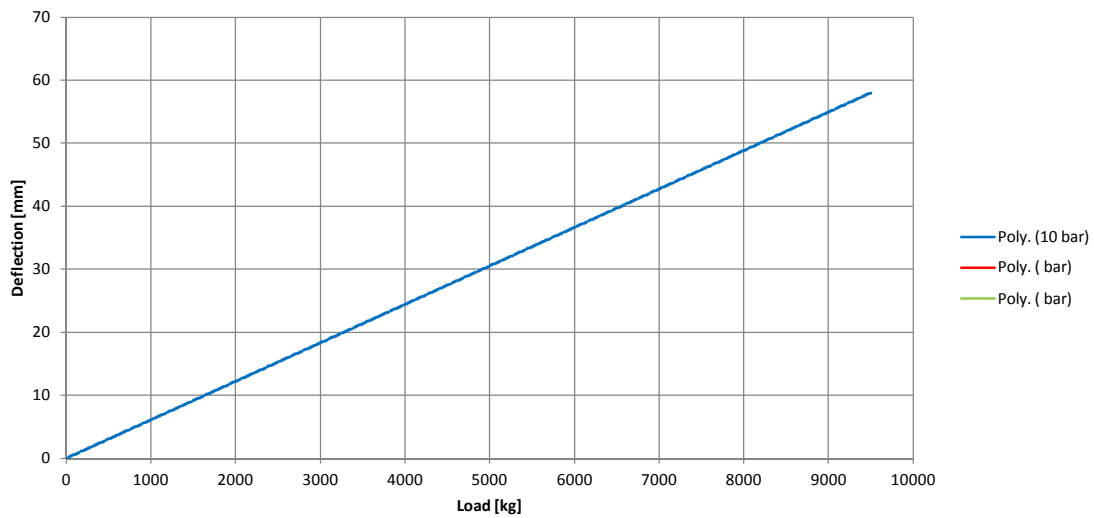

Ground Contact Area Gross [cm²]

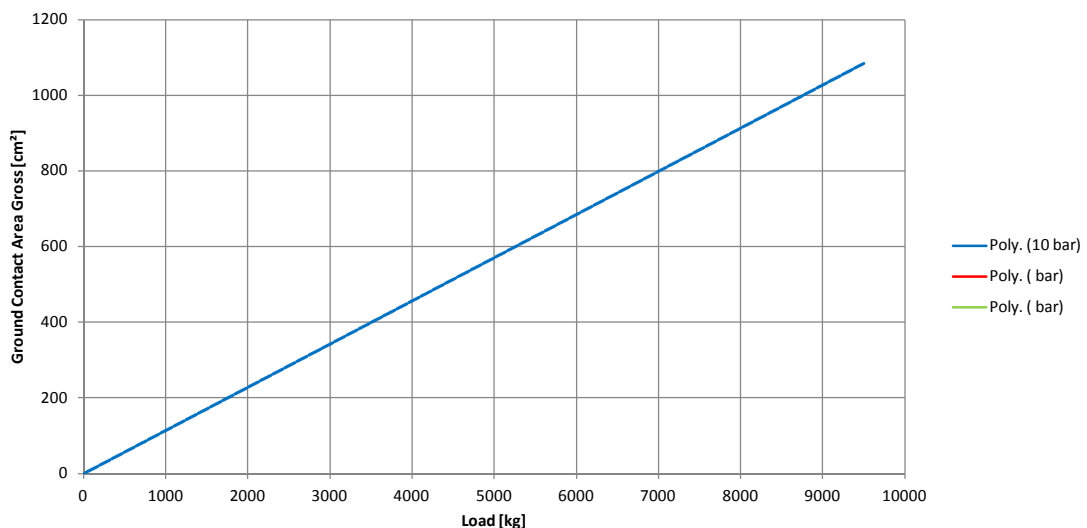

Date printed	14.06.2013	Date created	13.05.2013	Owner	MP
--------------	------------	--------------	------------	-------	----

Continental Reifen Deutschland GmbH
 P.O. Box 169
 D-30001 Hannover
 Germany

Business Unit Industrial Tires
 Phone +49 (0) 511-976 - 40760
 Fax +49 (0) 511-976 - 4022