




Tire Size: **16.00-25**
 Pattern: **Continental CraneMaster**
 Ply rate: **32PR**
 Load Index / Speed: **196 / A5**
 Tread: **E3**
 Article No / EAN No: **1215143 / 4019238586732**
 Application: **Industrial**



Tube Type: **TL**
 Rim: **25x11.25/2.0**
 Tube: **Tubeless**
 Flap: **Tubeless**
 Valve: **Tubeless**

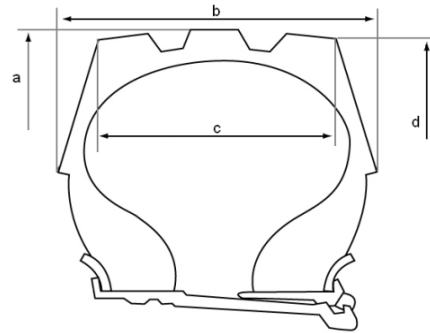

Technical Tire Data:

Outside diameter	(a)	[mm]	1485	+/-1%
Width	(b)	[mm]	440	+/-1%
Tread width	(c)	[mm]	-	+/-1%
Tread edge diameter	(d)	[mm]	-	+/-1%
Loaded static radius*		[mm]	661	+/-1%
Rolling circumference*		[mm]	-	+/-1%
Static loaded width*		[mm]	-	+/-1%
Tread Depth		[mm]	35,5	+/-1%
Minimum dual spacing		[mm]	518	+/-1%
*Reference load		[kg]	12.500	
*Rated pressure		[bar]	10	

Tire Load Capacity [kg] according to ETRTO**

Counterbalanced forklifts and similar vehicles (Reachstacker, ECH etc.)

Speed	0 km/h	1 km/h	5 km/h	10 km/h	20 km/h	25 km/h	30 km/h
Load wheel***	22.500	20.000	18.100	16.900	15.900	15.600	15.300
Steering wheel	18.000	16.000	14.500	13.500	12.800	12.500	12.100

Other vehicles

Speed	0 km/h	1 km/h	5 km/h	10 km/h	20 km/h	25 km/h	30 km/h
All wheels	18.000	16.000	14.500	13.500	12.800	12.500	12.100

** All loads valid for 10bar inflation pressure.
 *** applicable for cyclize service only

Date printed	30.05.2013	Date created	13.05.2013	Owner	JS
--------------	------------	--------------	------------	-------	----


Continental Reifen Deutschland GmbH
 P.O. Box 169
 D-30001 Hannover
 Germany

Business Unit Industrial Tires
 Phone +49 (0) 511-976 - 40760
 Fax +49 (0) 511-976 - 4022




Tire Size: **16.00-25**
 Pattern: **Continental CraneMaster**
 Ply rate: **32PR**
 Load Index / Speed: **196 / A5**
 Tread: **E3**
 Article No / EAN No: **1215143 / 4019238586732**
 Application: **Industrial**

Radial Deflection [mm]

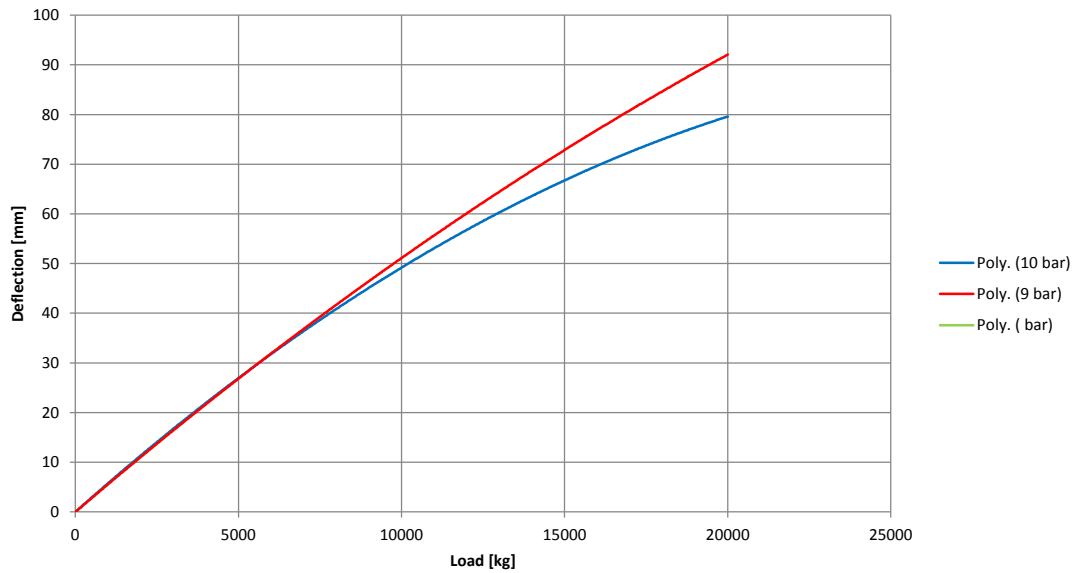

Ground Contact Area Gross [cm²]

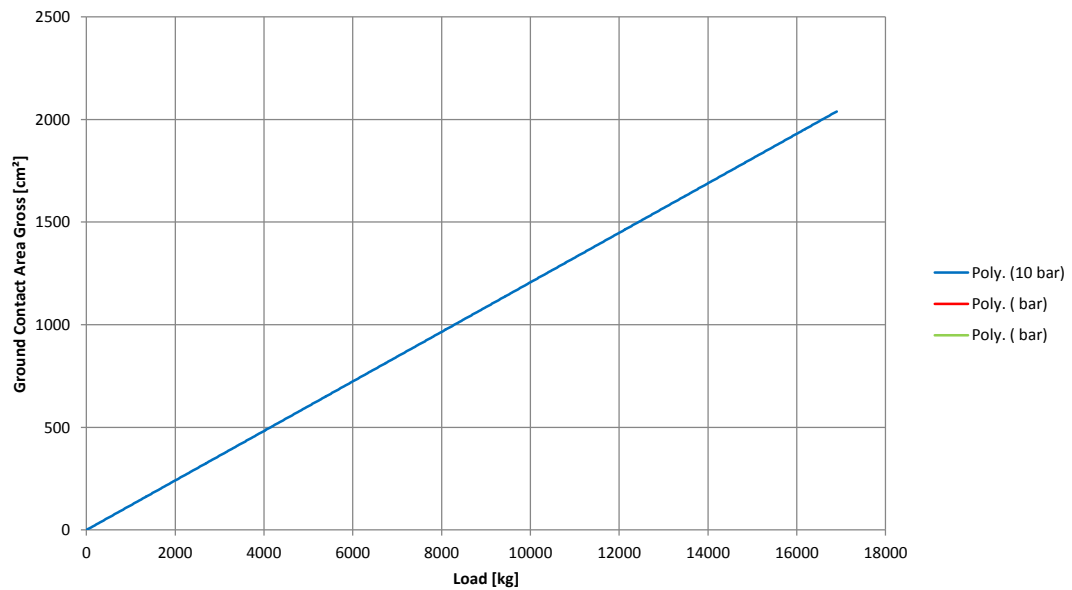

Date printed	30.05.2013	Date created	13.05.2013	Owner	MP
--------------	------------	--------------	------------	-------	----

Continental Reifen Deutschland GmbH
 P.O. Box 169
 D-30001 Hannover
 Germany

Business Unit Industrial Tires
 Phone +49 (0) 511-976 - 40760
 Fax +49 (0) 511-976 - 4022